


BT/ER M



Specification

- Steel SCM21
- HRC 56°- 58° for shank
- Thread with precision ground

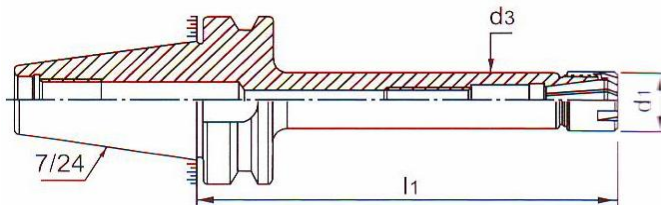

Taper	Order No.	d1	d3	Chucking Ø	Collet Type	ราคา
BT30	BT30-ER11M-60	16	15	1-7 mm	ER11	3,950
	BT30-ER11M-100					4,230
	BT30-ER16M-60	22	21	1-10 mm	ER16	3,950
	BT30-ER16M-100					4,230
	BT30-ER20M-100	28	27	1-13 mm	ER20	4,230
BT40	BT40-ER11M-70	16	15	1-7 mm	ER11	3,950
	BT40-ER11M-100					4,230
	BT40-ER16M-70	22	21	1-10 mm	ER16	3,950
	BT40-ER16M-100					4,230
	BT40-ER16M-150					4,720
	BT40-ER20M-70	28	27	1-13 mm	ER20	3,590
	BT40-ER20M-100					4,230
	BT40-ER20M-150					4,720
BT50	BT50-ER16M-100	22	21	1-10 mm	ER16	6,950
	BT50-ER16M-150					8,310
	BT50-ER16M-200					9,560
	BT50-ER20M-100	28	27	1-13 mm	ER20	6,950
	BT50-ER20M-150					8,310
	BT50-ER20M-200					9,560